

DNSSEC Overview

NANOG 51 Tutorial

Matt Larson

Vice President, DNS Research

Verisign Labs



DNS Security



- DNS has no security
- One UDP packet for query, one UDP packet for response
- Must rely on source IP-based authentication
- Easily spoofed
- Clever resolvers help a lot
- But we need something better

DNSSEC Timeline



- 1993: Discussion of secure DNS begins
- 1994: First draft of possible standard published
- 1997: RFC 2065 published (DNSSEC is an IETF standard)
- 1999: RFC 2535 published (DNSSEC standard is revised)
- 2005: Total rewrite of standards published
 - RFC 4033 (Introduction and Requirements)
 - RFC 4034 (New Resource Records)
 - RFC 4035 (Protocol Changes)
- July 15, 2010: Root zone signed
- July 29, 2010: *.edu* signed
- December 9, 2010: *.net* signed
- March 31, 2011: *.com* signed (planned)

What DNSSEC Does



- DNSSEC uses public key cryptography and digital signatures to provide:
 - Data origin authentication
 - “Did this DNS response really come from the *.com* zone?”
 - Data integrity
 - “Did an attacker (e.g., a man-in-the-middle) modify the data in this response since it was signed?”
- Bottom line: DNSSEC offers protection against spoofing of DNS data

What DNSSEC Doesn't Do



- DNSSEC does not:
 - Provide any confidentiality for DNS data
 - I.e., no encryption
 - The data in the DNS is public, after all
 - Address attacks against the name server itself
 - Denial of service,
 - Packets of death,
 - etc.

Key Pairs



- In DNSSEC, each zone has a public/private key pair
- The zone's public key is stored in the new **DNSKEY** record
- The zone's private key is kept safe
 - Stored offline (ideally)
 - Perhaps held in an HSM (Hardware Security Module)

The DNSKEY Record

```
test.com.      DNSKEY 256 3 5 (
                AwEAAa013Wp4CQaUBrExCIRZCYpT5K93FIP
                vOXfTkgT4LtMzEwRYnAONhKqpAaC7rAm2Jn+
                VlYnzIqmwELmn0EqI/e7cV8Bao94dX3xdcK+
                kZ6t5Of1hOLalyn/nsKZlH247VsEE62lHQNB
                4nxPBHIpwURLqd9ilTsSeLxG56PdCVuJ
                ) ; key id = 41148
                DNSKEY 257 3 5 (
                AwEAAckFh2HajtLkZr5JpNxjuhwnCOSlMuoV
                ZKs+EfmrEoQ+oUs1KM5Nc93XPdq4WTbNwBi8
                MYzdBDVZQys0byZzrm3VaPjJ/FIFOG8unhyn
                mWUMmk4azYYvq0YOSbJf1vzAJbF842+a3hFm
                5vTvuKZ8w9EhPd0rim0MBCV3jNetk/E9
                ) ; key id = 46894
```

- **DNSKEY record's fields:**
 - **256** or **257**, the 16-bit flags field
 - Bit 7 is set to indicate a DNSSEC zone key
 - Bit 0 is set to indicate a key-signing key (KSK)
 - **3**, the protocol octet
 - Will always be 3 to signify DNSSEC
 - **5**, the DNSKEY algorithm number (RSA with SHA1)
 - The public key itself, in base64
 - 1024-bit RSA keys in this example

Digital Signatures



- A zone's private key signs each resource record set (RRset) in a zone
 - RRset: records with same owner, class and type
 - Domain name *www.test.com*, class IN, type A
 - *www.test.com / IN / A*
- Each RRset's digital signature is stored in an **RRSIG** record
- Not all information in a zone is signed:
 - Delegation information (delegating NS records and glue A/AAAA records) is not signed
 - These records “really” belong to the child zone

The RRSIG Record



```
www.test.com.      86400  A      192.0.2.1
                   86400  A      192.0.2.2
                   86400  RRSIG  A 5 3 86400 20090507235959 (
                   20090501000000 41148 test.com.
                   s8dMOWQjoTKEo1bsK+EYUY+32Bd84300FcJf
                   lqthv1u60DVDVobl1hqt0AaiD/dl1nn7Yask6
                   xGe0u0lBbm06bsq28KP5rf9cR4bmmx68V1pQ
                   IKcm1Tx/Y1ixJHFIRMxMoEoiZp1sR9x/YIHL
                   C7F+4Xuk8sePEzz9vA92puhtkSA= )
```

- **RRSIG record's fields:**

- **A**, the type of records signed
- **5**, the digital signature algorithm used (RSA with SHA1)
- **3**, the number of labels in the signed name
- **86400**, the original time-to-live on the records signed
- **20090507235959**, when the signature expires
- **20090501000000**, when the records were signed
- **41148**, the key ID/tag/footprint
- **test.com.**, the signer's name
- Finally, the digital signature itself, in base64

Proving Something Doesn't Exist



- Negative errors:
 - Name Error (NXDOMAIN)
 - “No such data” (NOERROR/0)
- How do you prove cryptographically that the RRset doesn't exist?
- Could sign negative responses “on the fly”
- Or sign something ahead of time: the **NSEC** record

The NSEC Record



- The NSEC record spans a gap between two domain names in a zone
- The NSEC record...
 - Resides at a given domain name
 - Specifies what types exist at that name
 - Points to the next domain name in the zone
- Notion of a “next” record implies a canonical order
- Labels in a domain name are sorted by:
 - Shifting all characters to lowercase
 - Sorting non-existent bytes ahead of “0”
 - Sorting lexicographically from the highest-level label to the lowest

Ordering a Zone

- So the following example zone:

```
test.com.      SOA      ns.test.com.  root.test.com. (
                2009041800 1h 10m 30d 1d )
                NS      ns.test.com.
                A      10.0.0.1
                MX      0 mail.test.com.
ns              A      10.0.0.1
mail            A      10.0.0.2
www             A      10.0.0.3
ftp            CNAME   www.test.com.
west           NS      ns.west.test.com.
ns.west        A      10.0.0.5
east           NS      ns.east.test.com.
ns.east        A      10.0.0.6
```

Ordering a Zone

- Would sort to:

```
test.com.          SOA      ns.test.com.      root.test.com. (
                   2009041800 1h 10m 30d 1d )
test.com.          NS       ns.test.com.
test.com.          A       10.0.0.1
test.com.          MX       0 mail.test.com.
east.test.com.     NS       ns.east.test.com.
ns.east.test.com.  A       10.0.0.6
ftp.test.com.      CNAME   www.test.com.
mail.test.com.     A       10.0.0.2
ns.test.com.       A       10.0.0.1
west.test.com.     NS       ns.west.test.com.
ns.west.test.com.  A       10.0.0.5
www.test.com.      A       10.0.0.3
```

Adding NSEC Records

- And here's the zone with NSEC records added:

```
test.com.          SOA      ns.test.com. root.test.com. (
                    2009041800 1h 10m 30d 1d )
test.com.          NS       ns.test.com.
test.com.          A       10.0.0.1
test.com.          MX      0 mail.test.com.
test.com.          NSEC     east.test.com. A NS SOA MX NSEC
east.test.com.    NS      ns.east.test.com.
east.test.com.    NSEC     ns.east.test.com. NS NSEC
ns.east.test.com. A       10.0.0.6
ns.east.test.com. NSEC     ftp.test.com. A NSEC
ftp.test.com.     CNAME   www.test.com.
ftp.test.com.     NSEC     mail.test.com. CNAME NSEC
mail.test.com.    A       10.0.0.2
mail.test.com.    NSEC     ns.test.com. A NSEC
ns.test.com.      A       10.0.0.1
ns.test.com.      NSEC     west.test.com. A NSEC
west.test.com.    NS      ns.west.test.com.
west.test.com.    NSEC     ns.west.test.com. NS NSEC
ns.west.test.com. A       10.0.0.5
ns.west.test.com. NSEC     www.test.com. A NSEC
www.test.com.     A       10.0.0.3
www.test.com.     NSEC     test.com. A NSEC
```

Notes on NSEC



- The final NSEC “wraps around” from the last name in the ordered zone to the first
- Each NSEC record has a corresponding RRSIG

NSEC In Use



- Looking up *north.test.com*: the name doesn't exist
 - The response has return code NXDOMAIN and includes:

```
mail.test.com. NSEC ns.test.com. A NSEC
```

“No domain names in the zone between *mail.test.com* and *ns.test.com*”

- Looking up TXT records for *mail.test.com*: the name exists but has no TXT records
 - The response has return code NOERROR, no records in the answer section, and includes:

```
mail.test.com. NSEC ns.test.com. A NSEC
```

“No TXT records for *mail.test.com*, only A and NSEC”

Chain of Trust



- There are no certificates in DNSSEC
- The trust model is rigid
- The chain of trust flows from parent zone to child zone
- Only a zone's parent can vouch for its keys' identity

Types of Keys



- Signed zone has DNSKEY RRset at apex
 - Usually contains multiple keys
 - One or more **key-signing keys (KSKs)**
 - One or more **zone-signing keys (ZSKs)**
- **KSK**
 - Signs only the DNSKEY RRset
- **ZSK**
 - Signs the rest of the zone

Delegation Signer (DS) Records



- The **Delegation Signer (DS)** record specifies a child zone's KSK
 - DS record contains a cryptographic hash of child's KSK
- A zone's DS records only appear in its parent zone
 - Along with NS records at a delegation point
- DS records are signed by the parent zone

The DS Record

```
; This is an excerpt of the .com zone data file
test.com.      86400    NS       ns1.test.com.
                86400    NS       ns2.test.com.
                86400    DS       46894 5 1 (
                A6879FC55299A0985CF0D72B0EDAD528C10E
                FD00 )
                86400    DS       46894 5 2 (
                BEA484A06FBB93034A3FD9CE8C7F37391B0B
                FAA2AA58B1EB09A5B59DFBAF304B )
                86400    RRSIG    DS 5 2 86400 20090507235959 (
                20090501000000 810 com.
                D05vBDjM9hb01uaMk/GYG81aZWGCDp/Hn90P
                vpthFK4gPMwCvX+r3HQeKyWYzbEnr/mIAO1L
                6OLhi5vvbD48+UulDyplXVJ37nJrt9DiFN75
                z7nk2rjEctoNSZ3BI1NVwtvFl5zBHSDqih2x
                /dRJQ2ICfDVIDc3tdV8IPV0zJWE= )
```

- **DS record's fields:**
 - **46894**, the key ID/tag/footprint
 - **5**, the DNSKEY algorithm number (RSA with SHA1)
 - The digest type: **1** is SHA-1, **2** is SHA-256
 - Finally, the digest, in hexadecimal

Unsigned Zone Example: *example.com*

```
example.com.      SOA      <SOA stuff>
example.com.      NS       ns1.secure-hoster.net.
example.com.      NS       ns2.secure-hoster.net.
example.com.      A       192.45.56.67
example.com.      MX      10 mail.example.com.
mail.example.com. A       192.45.56.68
www.example.com.  A       192.45.56.67
```

Signed Zone Example: *example.com*

```
example.com.          SOA          <SOA stuff>
example.com.          RRSIG        SOA <RRSIG stuff>
example.com.          NS           ns1.secure-hoster.net.
example.com.          NS           ns2.secure-hoster.net.
example.com.          RRSIG        NS <RRSIG stuff>
example.com.          A           192.45.56.67
example.com.          RRSIG        A <RRSIG stuff>
example.com.          MX           10 mail.example.com.
example.com.          RRSIG        MX <RRSIG stuff>
example.com.          DNSKEY       <Key that signs example.com DNSKEY RRSets> ; KSK
example.com.          DNSKEY       <Key that signs the rest of example.com zone> ; ZSK
example.com.          RRSIG        DNSKEY <RRSIG stuff>
example.com.          NSEC        mail.example.com. SOA NS A MX DNSKEY RRSIG NSEC
example.com.          RRSIG        NSEC <RRSIG stuff>
mail.example.com.     A           192.45.56.68
mail.example.com.     RRSIG        A <RRSIG stuff>
mail.example.com.     NSEC        www.example.com. A RRSIG NSEC
mail.example.com.     RRSIG        NSEC <RRSIG stuff>
www.example.com.      A           192.45.56.67
www.example.com.      RRSIG        A <RRSIG stuff>
www.example.com.      NSEC        example.com. A RRSIG NSEC
www.example.com.      RRSIG        NSEC <RRSIG stuff>
```

Trust Anchors



- You have to trust somebody
- DNSSEC validators need a list of trust anchors
 - Keys (usually KSKs) that are implicitly trusted
 - Analogous to list of certificate authorities (CAs) in web browsers
- Trust anchor store can be updated via:
 - Manual process
 - Static configuration
 - DNSSEC “in band” update protocol
 - RFC 5011
 - Other trusted update mechanism
 - From name server or operating system vendor

Example Chain of Trust



- We are looking up A records for *www.verisign.com*.
- Trust anchor for root zone **KSK →**
 - Statically configured in the DNSSEC validator
- root **KSK → root ZSK → .com DS →**
 - In the root zone
- *.com* **KSK → .com ZSK → verisign.com DS →**
 - In the *.com* zone
- *verisign.com* **KSK → verisign.com ZSK →
www.verisign.com A**
 - In the *verisign.com* zone

NSEC3



- **NSEC3** is an alternative to NSEC providing:
 - Non-enumerability
 - Opt-Out
- Significant standards effort by Verisign, Nominet (*.uk* registry) and DENIC (*.de* registry)
- RFC 5155
 - Published February, 2008

Non-Enumerability


- Stops zone enumeration via “zone walking” the NSEC chain
- NSEC3 chain is hash of names
- Example:
 - Zone: *alpha.com, bravo.com, charlie.com*
 - NSEC chain:
 - *alpha.com → bravo.com → charlie.com*
 - NSEC3:
 - *H(bravo.com) → H(alpha.com) → H(charlie.com)*
 - *adfjkhjim.com → djadfjhifj.com → qsfiudfiud.com*

Opt-Out



- **Standard DNSSEC:**
 - Every name in a zone has an NSEC
 - Including delegations (NS records)
- **Opt-Out DNSSEC:**
 - Only secure delegations have an NSEC
 - I.e., delegations to zones that are themselves signed
- **Better for large zones like .com**
 - Many names, but few secure delegations
 - Shorter NSEC3 chain
 - Fewer signatures
 - Smaller signed zone

Changes for DNSSEC

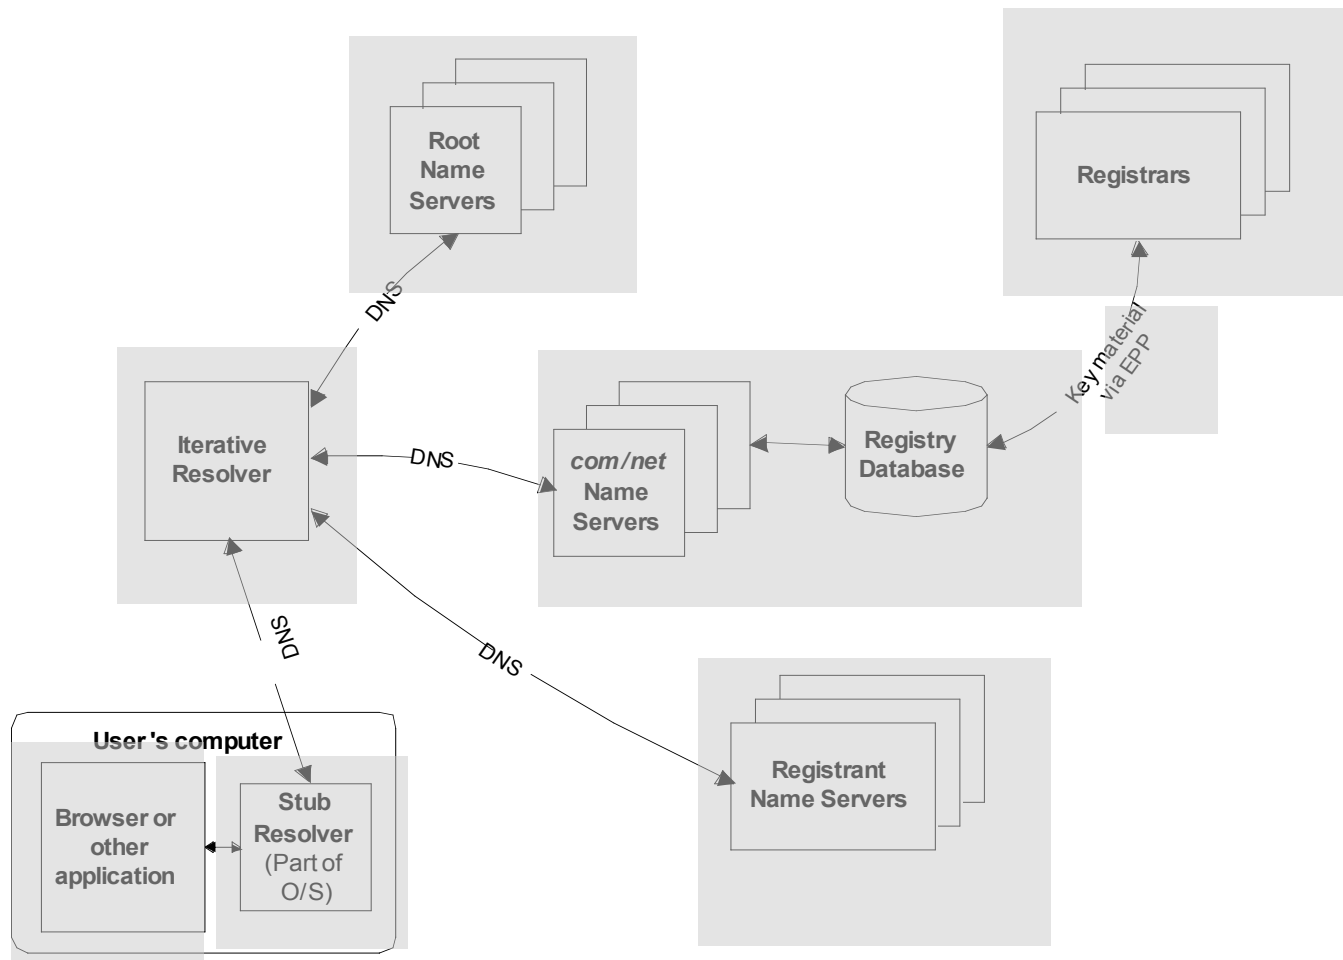

What will DNSSEC be used for?



- Protecting applications against DNS spoofing attacks
 - Recursive name servers will perform DNSSEC validation and throw away bad data before it reaches downstream clients
 - Eventually some stub resolvers and even applications may do their own DNSSEC validation
- Opening up DNS as a secure repository for various kinds of data
 - Web site authentication and privacy
 - Self-signed X.509 certificates authenticated by DNSSEC
 - Mail origin authentication
 - SSH host key authentication
 - Publication mechanism for other public keys?
 - Secure routing information repository?
 - The sky's the limit if data from the DNS has a higher level of trust than currently

Questions?



VERISIGN™