




Meet the new IP. Same as the old IP?

Paul Ebersman, IPv6 Evangelist
NANOG55, Vancouver BC (3-6 Jun 2012)


What you'll see immediately

- **More addresses**
 - 340 undecillion
- **Bigger, beefier addresses**
 - 2001:db8:dead:beef::1
- **Lots more addresses per interface**
- **More “magic”**

7 Layer View (Sorta)

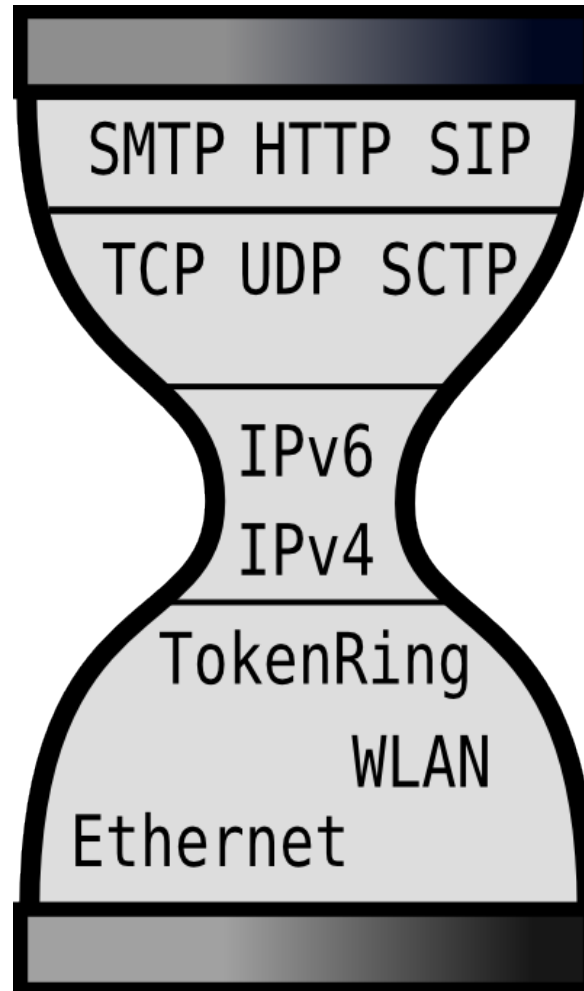


Routing Efficiencies



- **Fixed header size**
- **Extension header chain**
- **Flow labels in header**
- **No intermediate fragmentation (PMTUD)**
- **No checksums**


Network Efficiencies

- **No broadcast**
- **Multicast**
- **NS/Solicited Node, no ARP**
- **ICMPv6**




Type/Scope

Address Types




- **Unicast**
- **Multicast**
- **Anycast**

Address Scope




- **Link Local**
- **Global Unicast**
- **Unique Local**
- **Transition**
- **Misc (Site Local, Reserved, Special)**

Link Local




- **Local (broadcast) Domain**
- **fe80::/64**
- **Similar to APIPA (169.254.0.0/16)**
- **Reusable on all interfaces**

Global Unicast




- **Globally routable**
- **Unique**
- **“Public”**
- **Use ‘em everywhere!**

Unique Local




- **Not globally routable**
- **Not unique (but registerable...)**
- **Replacement for RFC1918 (if you must)**

More addresses per interface!



- Use 'em; we'll make more
- Multiple default routes
- Quiescence
- How do it know? (RFC 3484)



Subnet Planning

Sane Subnetting

- **You can get enough IPv6 space**
 - **Do the architecture you want, not the one you're stuck with**
 - **Use GUA space everywhere, make NAT a choice**
 - **Map your subnets to your process/provisioning or business model**
 - **Do a scheme that aggregates and makes ACLs sane**


Sample /32 Plan by Geography

- **2001:db8:abcd::/36**
 - **City**: 4 bits = 16 possible locations
- **2001:db8:abcd::/40**
 - **Hub**: 4 bits = 16 possible hubs per city
- **2001:db8:abcd::/48**
 - **Floor**: 8 bits = 256 floors per hub.
- **2001:db8:abcd:12xx::/56**
 - **Switch**: 8 bits = 256 Switches per floor.
- **2001:db8:abcd:1234::/64**
 - **VLAN**: 8 bits = 256 VLANs per switch.

Prefix Lengths

- **/48 is minimum routable chunk**
- **/64 for all non-p2p subnets**
- **/127 for p2p links (RFC 6164)**
- **/128 for loopbacks**
- **Use /64 each for p2p/lb, pair for each routing domain**

Use the whole /64!



- **IPv4 address shortages made pool size precious**
- **IPv6 has plenty**
- **Protect from brute force scans**
- **Do pay attention, though...**


Multi-homing and PI addresses

- If you qualified in v4, you still do
- If PI space would have been useful in v4, it still is
- If you didn't understand it in v4, v6 won't help you...




SLAAC vs DHCP

SLAAC




- **SLAAC == StateLess Address AutoConfiguration**
- **Uses Router Advertisement (RA) messages**
- **Network policy moved to the edge**

Interface ID generation



- **EUI-64 uses the mac address and an algorithm to generate interface ID**
- **Windows7/Vista randomly generates interface ID by default**
- **Servers and LINUX/UNIX mostly use EUI-64**

MAC-Address to Interface ID

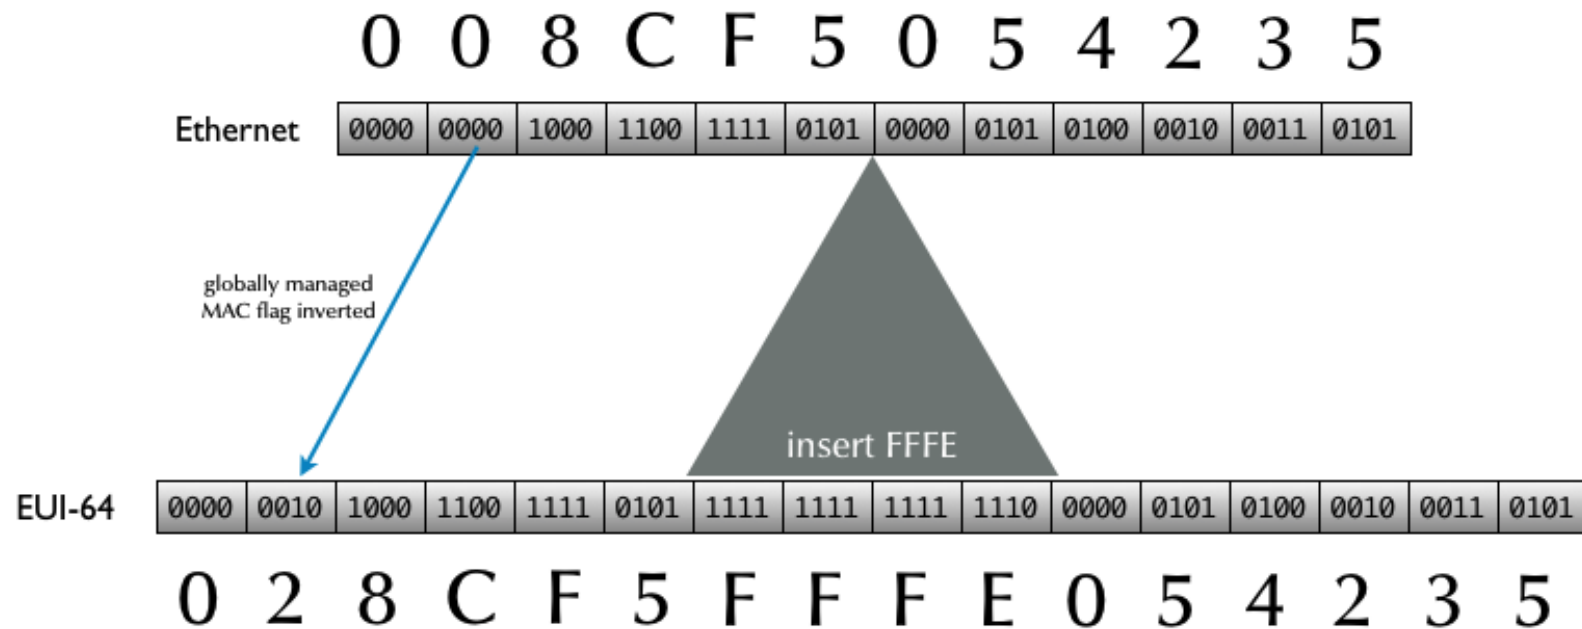

SLAAC Sequence

▪ Client configures link-local address

- Generates 64 bit host ID (EUID from MAC, random)
- Uses link local prefix and EUID to generate tentative address (such as fe80::028c:f5ff:fe05:4235)
- Does DAD (Duplicate Address Detection)
 - Sends a multicast Neighbor Solicitation message containing its new tentative address to the solicited node address
 - If no other node responds with a Neighbor Advertisement using that address, the host configures itself with that address

SLAAC Sequence cont.

- **Host now looks for Router Advertisement (RA) Messages**
 - Sends multicast Router Solicitation message
 - Listens for RA messages
 - Configures itself based on contents of RA message, including doing DHCPv6

RA Message Contents

- **Local prefix(es), including A (autonomous address configuration) flag**
- **Router info**
 - Router's link-level address
 - Lifetime of route
 - Router priority
- **Flags: M (ManagedAddress) flag and O (OtherConfiguration) flag**
- **Maximum Transmission Unit (MTU) of upstream link**

Not in RA Messages...

- **RDNS server**
- **NTP or “other” configuration**
- **RFC 6106 for RDNS in RA**
 - **Lack of client support...**


DHCPv6 features

- **Not BOOTP! ☺**
- **No broadcast!**
- **New ports (546, 547)**
- **Vendor options in TLV tuples**
- **Relays don't rewrite packets**

Prefix Delegation

- **Delegate a prefix to a device**
- **Device can delegate longer prefixes to its own clients**
- **Likely scenario is home/CPE routers**
- **Lots of potential but not lots of gear available now**

Reconfigure



- **Client and server must support and be configured for it**
- **Now has security**
- **With quiescence and reconfigure, renumbering is easy (mostly)**



**So much for the
good news...**


No Choice...

- **Must run both RA and DHCPv6 for most sites...**
 - No DHCPv6 without an RA message with M or O flag on
 - Many options not available to clients without DHCPv6
 - No default gateway in DHCPv6
 - Must configure DHCP and edges

Failover is so 5 minutes ago

- **Drivers in IPv4 for failover:**
 - Changing client IP address was user noticeable
 - Lack of large enough pools
- **If you use up 18 quintillion addrs...**
- **Fragility of keeping state**
- **High availability more useful**

Or is it...




- **Prefix delegation...**
- **Problems/parameters**
 - # of subnets available for PD small (relatively)
 - Changing PDs requires routing changes and reconvergence
- **Sound familiar?**

DUID > Mac address

- **Mac address as ID is flawed:**
 - Not always unique
 - Can be altered
 - Multi-interface hosts confuse things
- **But it's what most of the eyeballs on the Internet are ID'ed by currently**
- **DUID (DHCP Unique Identifier) is the replacement in IPv6**

What DUIDs do right



- **One DUID per DHCP server or client**
- **One Identity Association (IA) per network interface on a host**
- **A host can DHCP for all interfaces via DUID/IA as unique key**


Identity Associations

- **Types:**

- **IA_TA**: temporary address(es), i.e. privacy addrs
- **IA_NA**: non-temporary address(es), i.e. not privacy addrs
- **IA_PD**: prefix delegation

Where DUIDs don't work...

- **Anyone using mac address for identification or filtering**
- **Anyone trying to correlate IPv4 and IPv6 to the same machine/user**
- **Persistent storage of DUID may cause surprises**




ICMPv6


- **Required for:**
 - **DAD**
 - **Finding routers (RA/SLAAC)**
 - **Finding servers (DHCP)**
 - **PMTUD**
 - **Connectivity (echo request/response)**
 - **Network errors**

ICMPv6 Filtering

- **Filter it all and you don't have a useful network**
- **ICMPv6 much more detailed/precise in types and functions**
- **RFC 4890 has excellent filtering practices**



Security



- **Most issues much the same as IPv4**
- **Misconfiguration more likely than malice**
- **Untested code and lack of experience**
- **Security vendor claims must be validated**

Security improvement claims

- Subnet size makes brute force scanning pointless (if you really use it...)
- Privacy addresses
- IPSec

Security realities

- **Bad host numbering schemes**
- **IPSEC:**
 - **Good news: just like IPv4**
 - **Bad news: just like IPv4**
 - **Exception: Microsoft DirectAccess...**


Security homework

- **Test all your firewall and security appliances for IPv6**
 - ACLs for IPv6
 - Detect various tunneling (ISATAP, Teredo, 6in4, 6to4, etc)
- **Make sure all your NMS and logging deal with IPv6, both for transport and data**




The Standards Process

We're not done yet




- **Over 200 RFCs relating to IPv6**
- **But over 200 drafts in active revision too...**
- **More drafts added every IETF (3 meetings/year)**

What can we do?



- **Participate!**
- **Make sure your vendors participate and implement the new standards**
- **Pick your battles**



Q & A